



Dewatering Bags For Site Dewatering and Sediment Control

DESCRIPTION

These dewatering Bags have been designed to assist contractors and site engineers with dewatering of construction sites, lakes, and other water pumping applications. As water is pumped into the dewatering bag, sediment, silt, and sand is trapped inside. The water that was pumped into the bag is released through the dewatering bags' filtering material as near-clear water.

Additionally, the Dewatering Bags help protect the environment & comply with storm water regulations by reducing pollutants and helping to maintain ground water quality.

Dewatering Bags are manufactured using a nonwoven polypropylene geotextile stitched together via a double-needle seam. A fabric flange is also incorporated allowing a discharge hose of up to 6" to be attached.

AVAILABLE SIZES

Dewatering Bags are available in various sizes. The bags are colour coded for each size. They have lifting eyelets for easy positioning and lifting and a buckle to tighten around the hose flange up to 6".

CCIS-DW 3x5 Blue

CCIS-DW 5x7 Orange

CCIS-DW 10x10 Yellow

CCIS-DW 5x15 Silver

INSTALLATION

- Place dewatering Bags on a fairly level and stabilized area.
- Insert the pump discharge hose into the fabric flange and secure it tightly with the flange straps.
- Once the pump is operational, make sure that no unfiltered water is escaping from around the fabric flange.
- The bag can be removed using a loader or similar equipment and disposed of, or placed elsewhere onsite where the fines may be used. Be sure to follow any local regulations regarding disposal.



For Pricing And Availability Contact Our Sales Team at 780-962-6559

DEWATERING BAGS

The dewatering bags are created using needlepunched nonwoven geotextiles manufactured using polypropylene fibers that are formed into a dimensionally stable network, allowing the fibers to maintain their relative position. These bags resist ultraviolet deterioration, rotting, and biological degradation & are inert to commonly encountered soil chemicals.


PROPERTY	TEST METHOD	Typical English	Typical Metric
Tensile Strength (Grab)	ASTM D-4632	205 x 205 lbs / 912 x 912 N	250 x 250 N / 1113 x 1113 N
Elongation	ASTM D-4632	50% / 50%	50% / 50%
CBR Puncture	ASTM D-6241	525 lbs / 2336 N	625 lbs / 2781 N
Trapezoidal Tear	ASTM D-4533	80 x 80 lbs / 356 x 356 N	100 x 100 lbs / 445 x 445 N
UV Resistance (500 hrs)	ASTM D-4355	70% / 70%	70% / 70%
Apparent Opening Size (AOS)*	ASTM D-4751	80 US Std. Sieve / 0.18 mm	100 US Std. Sieve / 0.150 mm
Permittivity	ASTM D-4491	1.4 sec ⁻¹ / 1.4 sec ⁻¹	1.2 sec ⁻¹ / 1.2 sec ⁻¹
Water Flow Rate	ASTM D-4491	90 gpm/ft ² / 3667 lpm/m	80 gpm/ft ² / 3251 lpm/m

*Maximum Average Roll Valve


Notes:

- Mullen Burst ASTM D-3786 has been removed. It is not recognized by ASTM D-35 on Geosynthetics.
- Puncture ASTM D-4833 has been removed. It is not recognized by AASHTO M288 and has been replaced with CBR Puncture ASTM D-6241

TOP VIEW

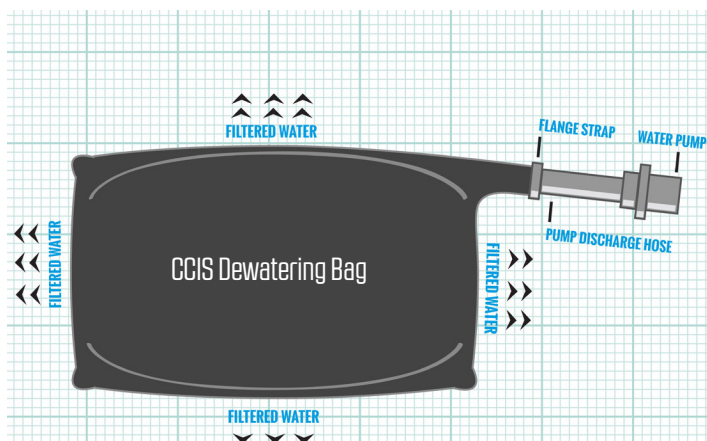

SIDE VIEW

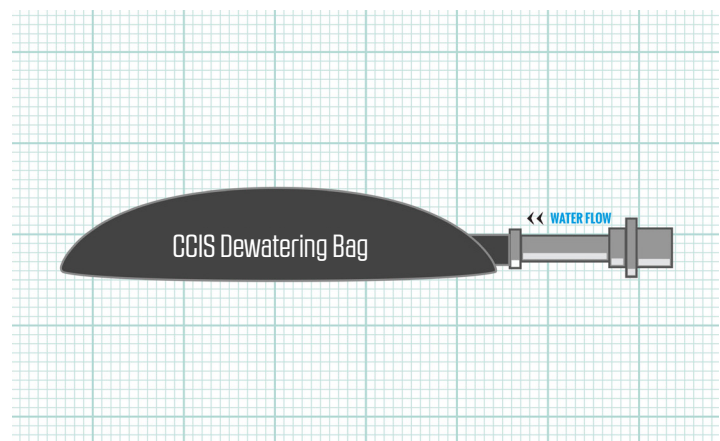

Disclaimer: Cross Country assumes no liability for the completeness or accuracy of this information or the ultimate use of this information. Cross Country disclaims any and all implied, expressed, or statutory standards, guarantees, or warranties. This includes without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to equipment, materials, or information furnished herewith. This document should not be construed as engineering advice. Always consult the project engineer for project specific requirements. The end user assumes sole responsibility for the use of this information and product. The property values listed above are subject to change without notice.



For Pricing And Availability Contact Our Sales Team at 780-962-6559