

MIDWESTERN

HTU-500 Skid Mount

Pressure Pump Specifications

- Type: Positive displacement three plunger pump
- Operating Volume: 27 gpm (102 Lpm)
- Operating Pressure: 3,265 psi (22,511 kPa)

Fill Pump Specifications

- Type: Centrifugal Pump
- Operating Volume: 500 ft of head pressure at 600 gpm (2,271 Lpm)
- Maximum Operating Pressure: 250 psi (1,724 kPa)

Power Source Specifications


- Type: Duetz diesel engine rated at 207.5 hp at 2500 rpm (155 kW at 2500 rpm)
- Capacity: 70 gallons diesel (265 liters)

Skid Mount Specifications

- Transport Width: 96" (2,438 mm)
- Transport Length: 204" (5,181 mm)
- Transport Height: 73" (1,854 mm)
- Approx. Shipping Weight: 7,500 lbs. (3,402 kg)



HTU-500 Hydrostatic Fill and Testing Unit

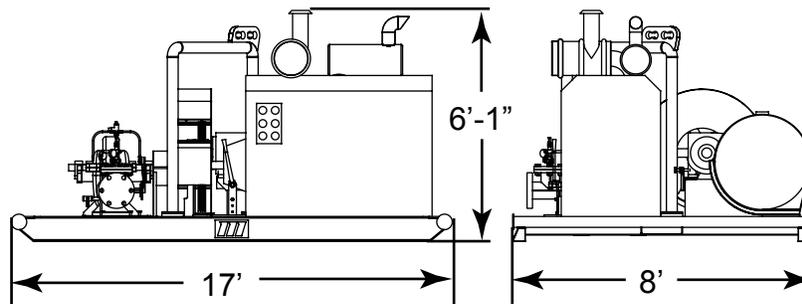

MIDWESTERN