



CCIST Float

The CCIST Float are specifically designed to keep the intake of the float as close to the surface of the product being pumped as possible. This reduces the amount of sediment and solids supplied to the pump reducing wear and tear. The screen intake area is designed to keep the velocity below 3 fps reducing the potential for vortex.

CCIST Float are available in diameters from 4" to 30" in 2" increments. The CCIST Float are fabricated from HOPE pipe expertly fused to insure an air tight seal, durability and extended life. The appropriate fittings and reducers are available depending on the size of the float.




CCIST Float working in a phosphate mine

FEATURES / OPTIONS

- Rugged, reliable and coupling free to eliminate air leaks
- Reduces pump end wear and tear
- Land based ease of assembly and installation
- Low Velocity screen and buoyancy reduces intake of sediment
- Lessen cavitation and vortex risk
- Easily custom fabricated to required length

Available in even sizes from 4" to 30" in diameter

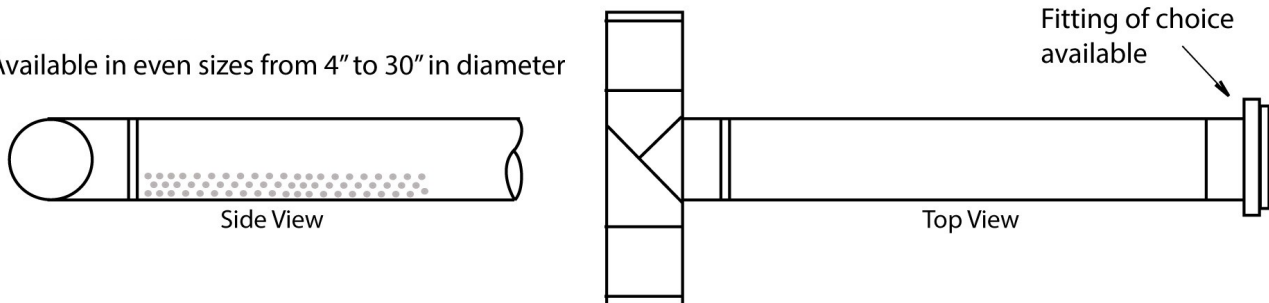

Exact dimensions for the size you require are available



Contact Us Today at **1-855-955-CCIS (2247)** or Visit **CrossCountryIS.com**

Specifications and illustrations are subject to revision without notice.
Cross Country is not liable for any consequential, incidental or indirect damages relating to these specifications.