
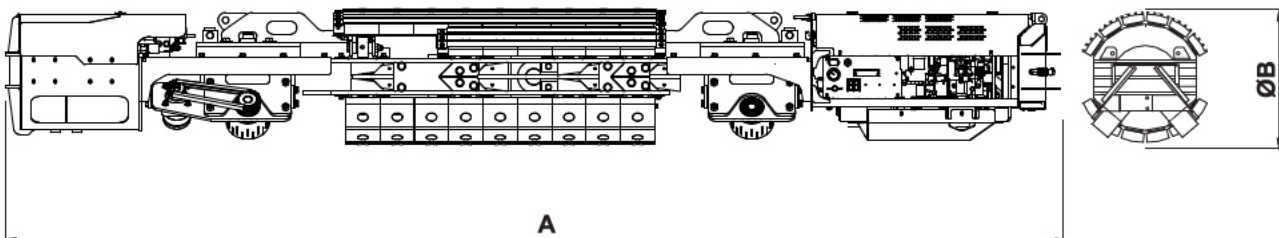


Self Contained Mandrel SCWH

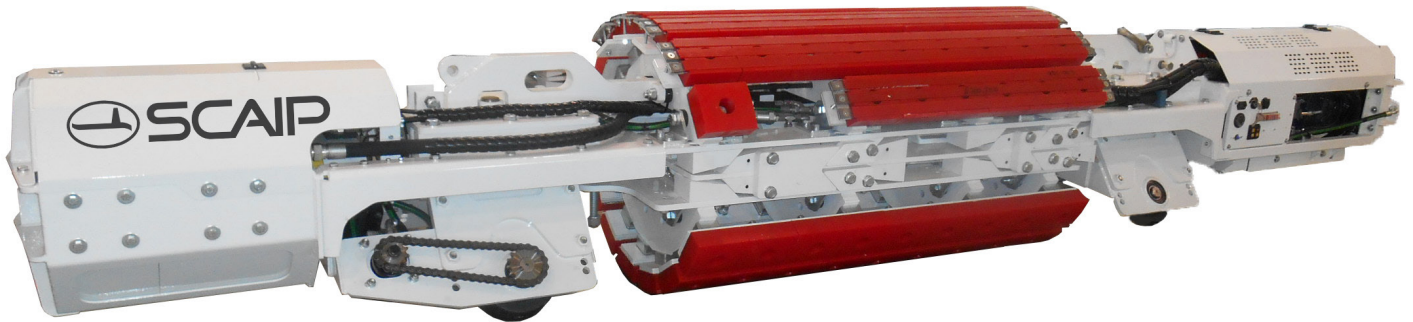

| Dimension / Model | SCWH 30-32 | SCWH 34-36 | SCWH 42-44 | SCWH 46-48 |
|------------------------------------|----------------------|----------------------|-----------------------|-----------------------|
| Mandrel Length (A) | 4900 mm ; 193 inc | | 5450 mm ; 215 inc | |
| Mandrel Diameter (Øb) | 650 mm ; 26 inc | 800 mm ; 31.5 inc | 900 mm ; 35.4 inc | 1070 mm ; 42 inc |
| Net Weight | 2450 kg ; 5400 lb | 2550 kg ; 5620 lb | 4800 kg ; 10580 lb | 5000 kg ; 11020 lb |
| Hyd System Max Working Pressure | 250 bar ; 3625 psi | | | |
| Hyd System Max Flow | 60 l/min ; 15.85 gpm | | | |


The information provided in this brochure is indicative. The manufacturer may change the models described in this brochure at any time for technical and commercial purposes. The illustrations in this brochure do not necessarily show a standard version of the machine.

General Specifications



Engine

| | |
|---------------------|----------------------|
| Engine Displacement | 1498 cm ³ |
| Cylinders | 4 |
| Net flywheel power | 18.5 kW/2300 rpm |
| Fuel | Diesel |
| Cooling | Water cooled |

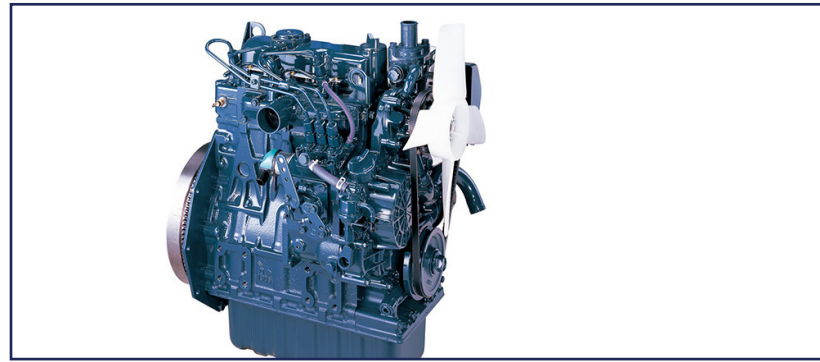

Electrical System

| | |
|-------------------|-------|
| Operating voltage | 12 V |
| Batteries | 12 V |
| Capacity (total) | 55 Ah |



Hydraulic System

| | |
|----------------------|-----------------------|
| Main pumps | 1 |
| Flow max | 60 l/min (16 gal/min) |
| Working Max pressure | 250 bar (3626 p.s.i.) |




Controls

| | |
|------|--------------------------------|
| Type | Remote control (radio control) |
|------|--------------------------------|

Fluid Capacities

| | |
|-----------------------|-----------------------|
| Diesel fuel tank | 40 l (10.5 U.S. gal) |
| Hydraulic oil tank | 60 l (16 U.S. gal) |
| Engine cooling system | 4.0 l (1 U.S. gal) |
| Engine oil | 6.0 l (1,6 U.S. gal) |

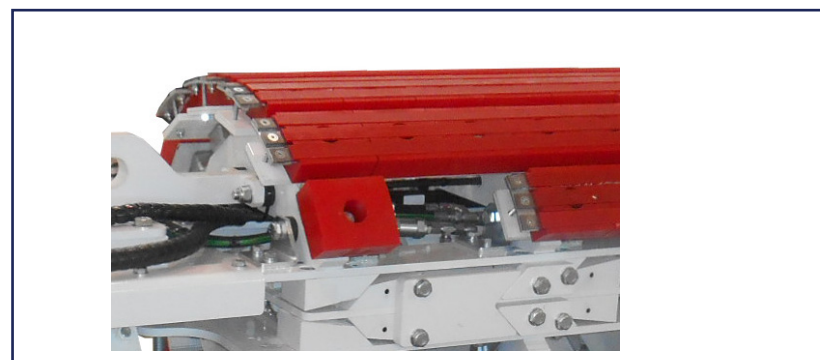

For Pricing And Availability Contact Our Sales Team at 1-855-955-GCIS (2247)